



Hello Sewing

Tissue Holder with Boxed Corners

Instructions and Video at [https://hellosewing.com/tissue-holder-with-boxed-corners/#Tissue Holder with Boxed Corners VIDEO TUTORIAL](https://hellosewing.com/tissue-holder-with-boxed-corners/#Tissue%20Holder%20with%20Boxed%20Corners%20VIDEO%20TUTORIAL)

Supplies and Tools

- 1 x main fabric 6 1/2 x 5 3/4 inches (16.5 x 14.5cm)
- 1 x backing fabric 7 3/4 x 5 3/4 inches (19.5 x 14.5 cm)
- matching thread
- scissors (or rotary cutter and a cutting mat)
- ruler or measuring tape
- iron and ironing board
- sewing clips or pins

Instructions

STEP 1:

Place the two pieces of fabric right sides facing each other and line up the top and bottom and one side on the left. Pin the left-hand side.

STEP 2:

There will be extra fabric, which will form the trim of the tissue holder, so you now line up the right-hand sides and pin – there will be extra of the lining fabric, but you'll soon see how this works.



Step 2: The two ends are pinned together even though they are different lengths.

STEP 3:

Stitch down each side you have pinned using a seam allowance of $\frac{1}{4}$ of an inch (6 mm), backtacking at the start and finish of each seam.

STEP 4:

Turn the right way out and press the seam allowance towards the backing fabric.



Step 4: Pressing the seam toward the backing fabric.

STEP 5:

Adjust the fabric so the main fabric has an equal amount of the backing fabric showing on each side – use your ruler or measuring tape to make sure they are equal.



Step 5: A little of the backing fabric showing on both sides.

STEP 6:

Fold over so the main fabric is face to face, with the stitched seams lined up and press the fold.



Step 6: Fold in half with the main fabric inside and press.

STEP 7:

Open out the fabric, main fabric piece uppermost and fold in each of the sides to meet on the middle fold and clip in place.



Step 7: Fold ends in to meet the center fold, overlapping the edging, main fabric on the inside and pin or clip.

STEP 8:

Stitch along the top raw edge with a seam allowance of $\frac{1}{4}$ inch (6 mm), then repeat with the opposite raw edge.

STEP 9:

Use a medium zig-zag stitch to finish off the raw edges or use a serger (overlocker) if you have one.



Step 8 & 9: Stitch along the top and bottom edges, and zig-zag or serge the edges.

STEP 10:

To make the boxed corners take each corner and pull to create a triangle, use a measuring tape to measure up $\frac{3}{8}$ of an inch (1cm) up from the corner and draw a line across the base of the triangle. Repeat with the other 3 corners, placing a pin in each to keep them in place.



Step 10: Mark and pin each corner.

STEP 11:


Stitch across each of the four corners, backtracking to ensure they are secure.

STEP 12:

Trim the extra threads and turn the right way out.




6 1/2 inches
(16.5 cm)

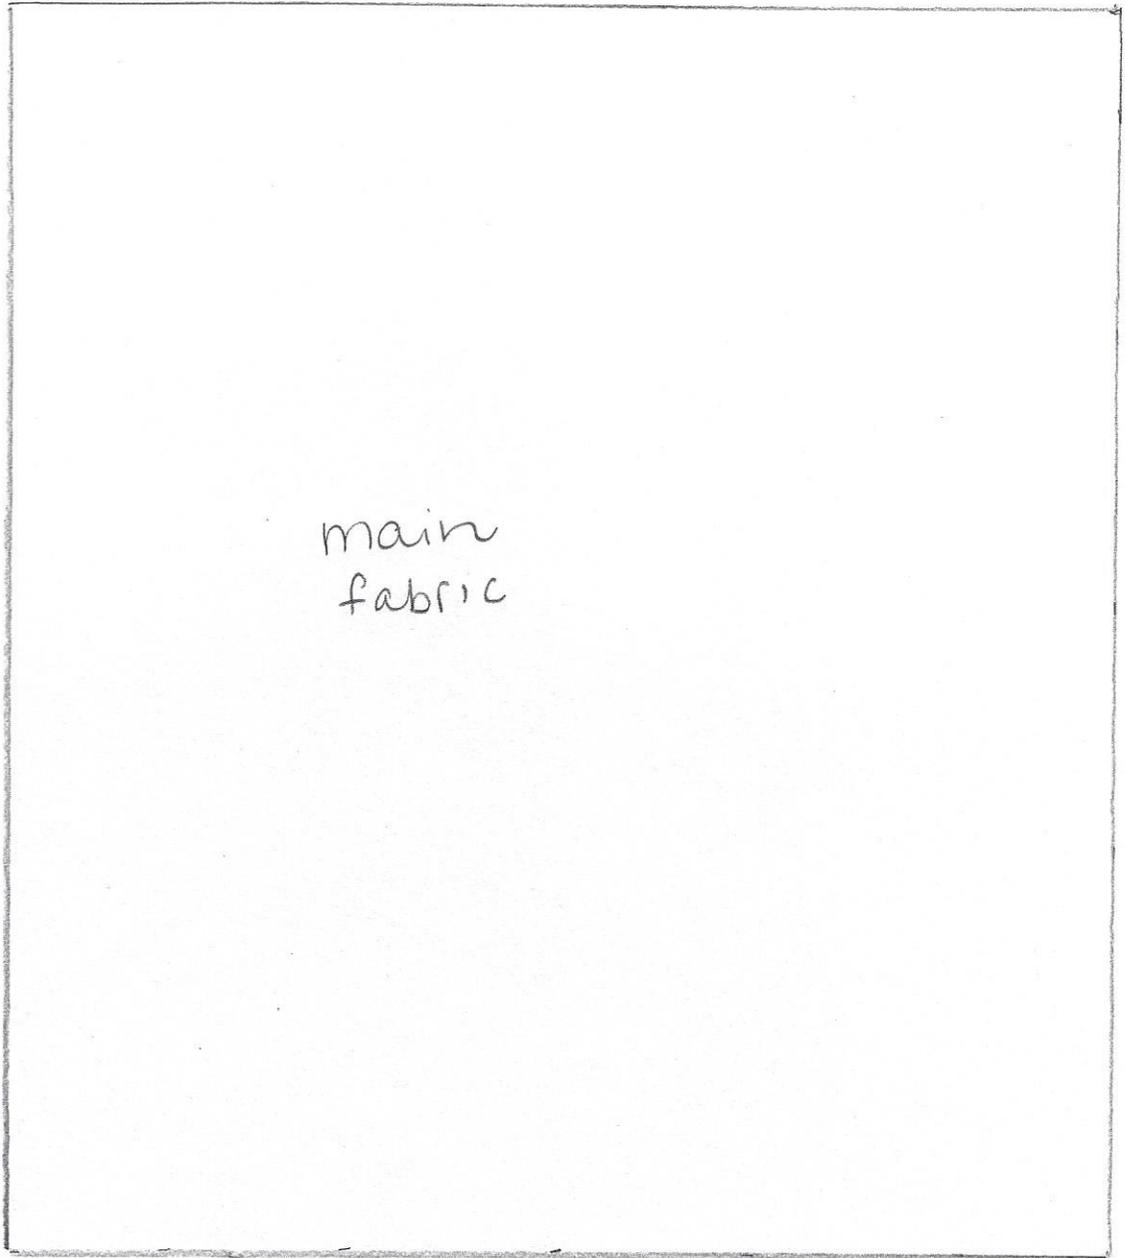

main
fabric

5 3/4 inches
(14.5 cm)

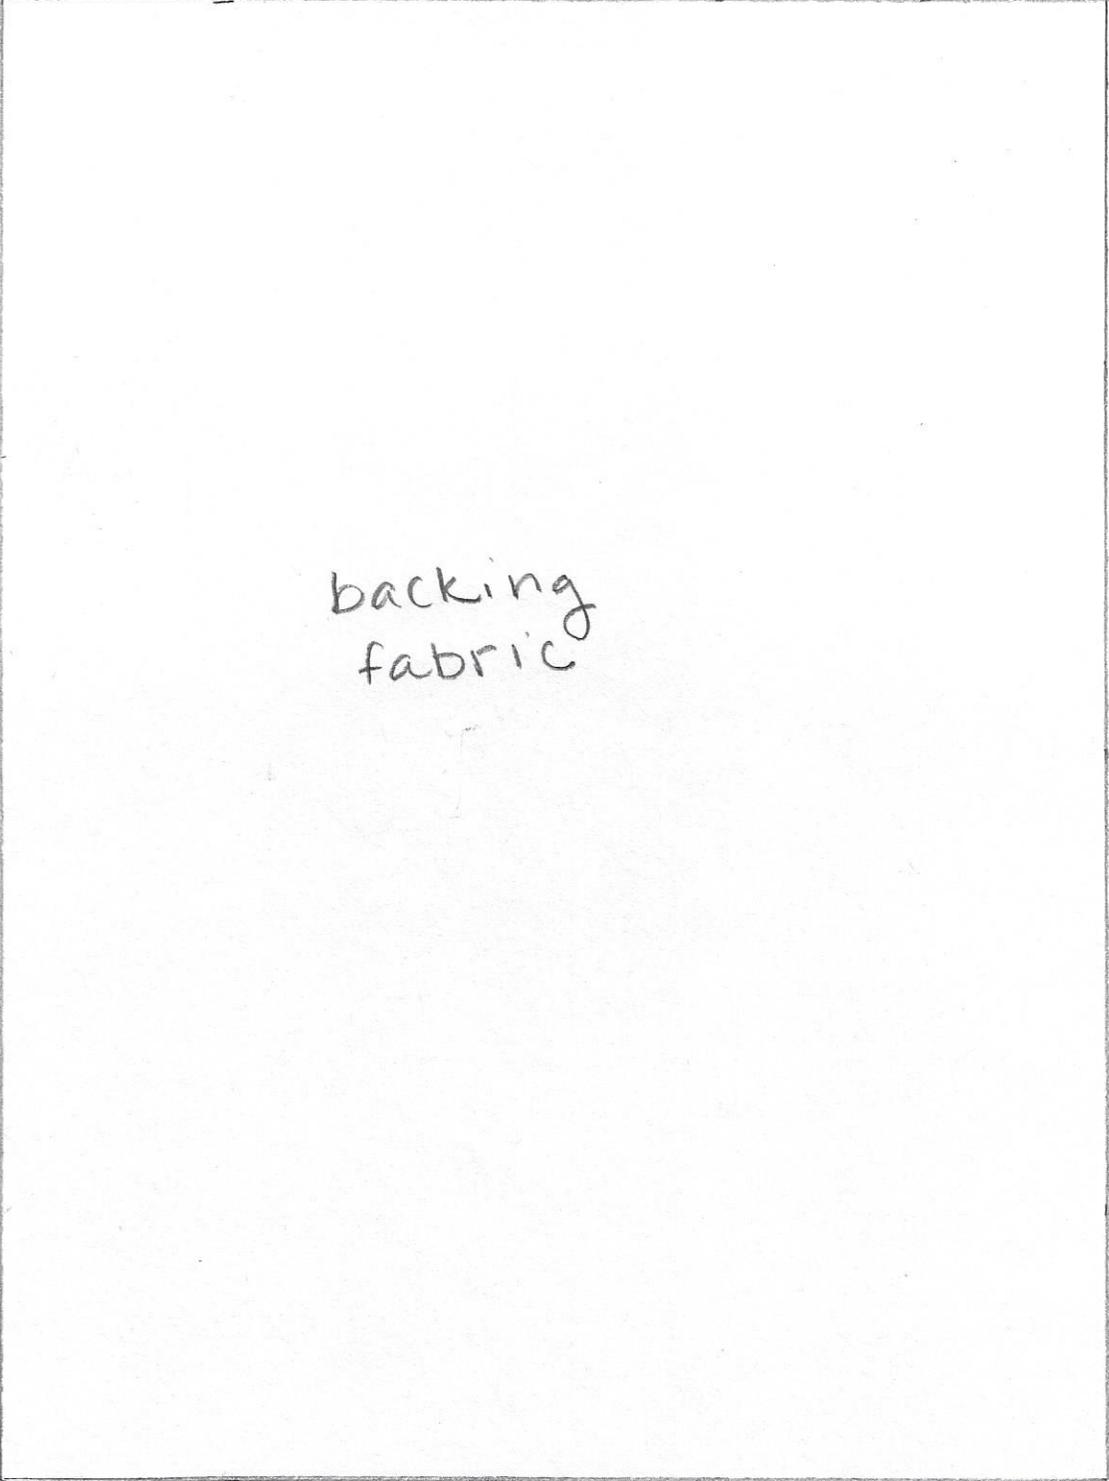

backing
fabric

$7\frac{3}{4}$ inches
(19.5 cm)

$5\frac{3}{4}$ inches
(14.5 cm)